

MAXHUB |  Microsoft Teams


# MAXHUB MIC POD DM30

The MAXHUB Mic Pod DM30 is a professional-grade expansion microphone engineered to optimize audio in Microsoft Teams Rooms. Featuring 360° AI powered voice pickup, seamless daisy chaining capability, and an intuitive one-touch mute function, it delivers studio-quality clarity for every participant in medium to large meeting spaces.



**360° VOICE INTELLIGENT**

**AI noise reduction  
AGC, and AEC**

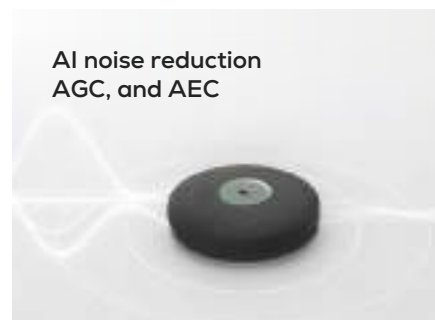


**One-touch mute with  
smart LED feedback**



**8 mics array**



**360° omnidirectional  
pickup**

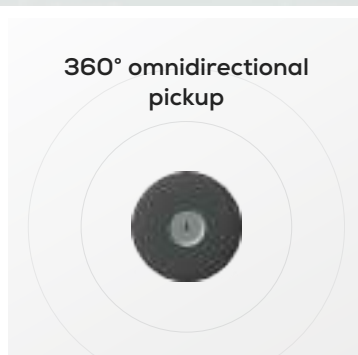

**3m optimal  
pickup radius**




**Non-slip base**

With optional desktop mounting kit




**Daisy-chain**

Up to 4 units

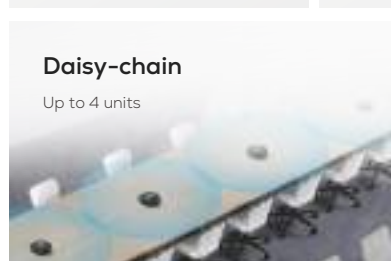

**Manage From One Screen**

With IP-based  
protocol for visual  
management

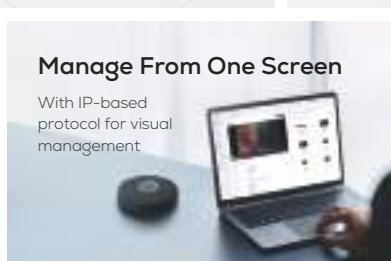

**Compatibility with  
MAXHUB XBar  
built-in mic**



## Product Specification

|                                        |                    |
|----------------------------------------|--------------------|
| Quantity                               | 8                  |
| Pickup Distance                        | 3 m (Optimal)      |
| Type                                   | Silicon Microphone |
| Frequency Range                        | 100 Hz – 20 kHz    |
| Microphone Unit Sensitivity            | -37dBFS            |
| Maximum Number of Devices in a Cascade | 4 units            |

### I/O ports

|                 |                                                                                                                      |
|-----------------|----------------------------------------------------------------------------------------------------------------------|
| Port            | Dual RJ45 Ports INPUT(RJ45): 52V / 0.24A<br>OUTPUT(RJ45): 52V / 0.18A                                                |
| Touch Button    | Mute/Unmute the microphone                                                                                           |
| Indicator Light | Green Light: In meeting – microphone active<br>Red Light: In meeting – microphone muted<br>White Light: Standby mode |

### Environmental Conditions

|                       |                   |
|-----------------------|-------------------|
| Operation Temperature | 0°C~40°C          |
| Operation Humidity    | 10%~90%RH         |
| Storage Temperature   | -20°C~60°C        |
| Storage Humidity      | 10%~90%RH         |
| Altitude              | Below 5000 meters |

### Physical Specifications

|                             |       |                    |
|-----------------------------|-------|--------------------|
| Dimension (D×H)             |       | φ112.5 × 30.3 mm   |
| Dimension (package) (L×W×H) | 1pcs  | 208 × 187 × 114 mm |
|                             | 10pcs | 595 × 395 × 250 mm |
| Net Weight                  |       | 0.265 kg           |
| Gross Weight                | 1pcs  | 0.9 kg             |
|                             | 10pcs | 10.5kg             |

### Accessories

|                               |    |
|-------------------------------|----|
| 7.5 m (24.6 ft) Network Cable | ×1 |
| Cable Grommet                 | ×1 |
| Screw Kit                     | ×1 |
| Mounting Bracket              | ×1 |

### Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.